



R




| 商品コードNo. | ねじR | Y mm | A mm | (L) mm | 概略重量 g |
|----------|-------|------|------|--------|--------|
| AS04R | 1/4 | 17 | 13 | 41 | 30 |
| LS04R | 1/4 | 17 | 13 | 41 | 30 |
| AS06R | 3/8 | 19 | 15 | 46 | 55 |
| LS06R | 3/8 | 19 | 15 | 46 | 50 |
| AS08R | 1/2 | 22 | 18 | 70 | 115 |
| LS08R | 1/2 | 22 | 18 | 51 | 80 |
| UT1012R | 3/4 | 30 | 20 | 73 | 185 |
| UT12R | 3/4 | 30 | 20 | 73 | 215 |
| UN12R | 3/4 | 30 | 20 | 85 | 257 |
| UT16R | 1 | 36 | 22 | 82 | 325 |
| UN16R | 1 | 36 | 22 | 89 | 401 |
| UT20R | 1 1/4 | 46 | 25 | 113 | 645 |
| LC24R | 1 1/2 | 50 | 25 | 115 | 755 |

F




| 商品コードNo. | ねじG | X mm | Y mm | (L) mm | 概略重量 g |
|----------|-------|------|------|--------|--------|
| AS04F | 1/4 | 19 | 17 | 47 | 50 |
| LS04F | 1/4 | 19 | 17 | 47 | 45 |
| SR04F | 1/4 | 19 | 17 | 45 | 45 |
| AS06F | 3/8 | 22 | 19 | 50 | 70 |
| LS06F | 3/8 | 22 | 19 | 50 | 65 |
| AS08F | 1/2 | 27 | 22 | 73 | 140 |
| LS08F | 1/2 | 27 | 22 | 54 | 105 |
| UT1012F | 3/4 | 36 | 30 | 78 | 255 |
| UT12F | 3/4 | 36 | 30 | 79 | 290 |
| UN12F | 3/4 | 36 | 30 | 91 | 332 |
| UT16F | 1 | 41 | 36 | 88 | 410 |
| UN16F | 1 | 41 | 36 | 95 | 486 |
| UT20F | 1 1/4 | 50 | 46 | 120 | 745 |
| LC24F | 1 1/2 | 55 | 50 | 124 | 865 |

C




| 商品コードNo. | ねじG | X mm | Y mm | (L) mm | 概略重量 g |
|----------|-------|------|------|--------|--------|
| LC0304C | 1/4 | 19 | 17 | 45 | 45 |
| AS04C | 1/4 | 19 | 17 | 47 | 50 |
| LS04C | 1/4 | 19 | 17 | 47 | 50 |
| SR04C | 1/4 | 19 | 17 | 45 | 45 |
| AS06C | 3/8 | 22 | 19 | 50 | 70 |
| LS06C | 3/8 | 22 | 19 | 50 | 70 |
| AS08C | 1/2 | 27 | 22 | 73 | 140 |
| LS08C | 1/2 | 27 | 22 | 54 | 105 |
| UT1012C | 3/4 | 36 | 30 | 78 | 260 |
| UT12C | 3/4 | 36 | 30 | 79 | 300 |
| UN12C | 3/4 | 36 | 30 | 91 | 337 |
| UT16C | 1 | 41 | 36 | 88 | 415 |
| UN16C | 1 | 41 | 36 | 95 | 491 |
| UT20C | 1 1/4 | 50 | 46 | 120 | 760 |
| LC24C | 1 1/2 | 55 | 50 | 124 | 895 |

CR4




| 商品コードNo. | ねじG | X mm | H mm | (L) mm | 概略重量 g |
|-----------|-------|------|------|--------|--------|
| LC0304CR4 | 1/4 | 19 | 17 | 61 | 50 |
| AS04CR4 | 1/4 | 19 | 24 | 60 | 55 |
| SR04CR4 | 1/4 | 19 | 24 | 58 | 50 |
| AS06CR4 | 3/8 | 22 | 26 | 71 | 85 |
| LS06CR4 | 3/8 | 22 | 26 | 71 | 80 |
| AS08CR4 | 1/2 | 27 | 22 | 106 | 200 |
| UT12CR4 | 3/4 | 36 | 29 | 100 | 350 |
| UN12CR4 | 3/4 | 36 | 29 | 112 | 387 |
| UT16CR4 | 1 | 41 | 33 | 120 | 535 |
| UN16CR4 | 1 | 41 | 34 | 127 | 610 |
| UT20CR4 | 1 1/4 | 50 | 38 | 151 | 985 |
| LC24CR4 | 1 1/2 | 55 | 52 | 218 | 1,755 |

CR9




| 商品コードNo. | ねじG | X mm | H mm | (L) mm | 概略重量 g |
|--------------|-------|------|------|--------|--------|
| LC0304CR9N24 | 1/4 | 19 | 24 | 49 | 50 |
| AS04CR9 | 1/4 | 19 | 24 | 51 | 55 |
| LS04CR9 | 1/4 | 19 | 24 | 51 | 50 |
| SR04CR9 | 1/4 | 19 | 24 | 50 | 50 |
| AS06CR9 | 3/8 | 22 | 38 | 51 | 85 |
| LS06CR9 | 3/8 | 22 | 38 | 51 | 80 |
| AS08CR9 | 1/2 | 27 | 46 | 92 | 200 |
| LS08CR9 | 1/2 | 27 | 46 | 69 | 150 |
| UT12CR9 | 3/4 | 36 | 60 | 90 | 380 |
| UN12CR9 | 3/4 | 36 | 60 | 102 | 417 |
| UT16CR9 | 1 | 41 | 70 | 109 | 605 |
| UN16CR9 | 1 | 41 | 70 | 116 | 676 |
| UT20CR9 | 1 1/4 | 50 | 80 | 139 | 1,105 |
| LC24CR9T105 | 1 1/2 | 55 | 105 | 180 | 1,280 |

S




| 商品コードNo. | A mm | B mm | φ mm | (L) mm | 概略重量 g |
|----------|-------|-------------|------|--------|--------|
| UT12S | 38.10 | 31.88~31.75 | 35 | 75 | 240 |
| UT16S | 44.45 | 39.75~39.62 | 35 | 87 | 335 |
| UT20S | 50.80 | 44.58~44.45 | 44 | 115 | 590 |
| LC24S | 60.32 | 53.98~53.72 | 44 | 115 | 650 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

SR4




| 商品コードNo. | A mm | B mm | H mm | (L) mm | 概略重量 g |
|----------|-------|-------------|------|--------|--------|
| UT12SR4 | 38.10 | 31.88~31.75 | 25 | 96 | 285 |
| UT16SR4 | 44.45 | 39.75~39.62 | 28 | 106 | 420 |
| UT20SR4 | 50.80 | 44.58~44.45 | 30 | 134 | 670 |
| LC24SR4 | 60.32 | 53.98~53.72 | 37 | 153 | 975 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

SR9

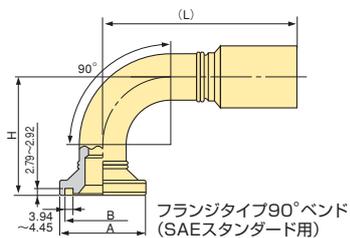


| 商品コードNo. | A mm | B mm | H mm | (L) mm | 概略重量 g |
|-----------|-------|-------------|------|--------|--------|
| UT12SR9 | 38.10 | 31.88~31.75 | 54 | 89 | 325 |
| UT1620SR9 | 50.80 | 44.58~44.45 | 67 | 103 | 520 |
| UT16SR9 | 44.45 | 39.75~39.62 | 60 | 102 | 475 |
| UT20SR9 | 50.80 | 44.58~44.45 | 67 | 137 | 815 |
| LC24SR9 | 60.32 | 53.98~53.72 | 80 | 143 | 895 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

G



| 商品コードNo. | ねじG | Y mm | A mm | (L) mm | 概略重量 g |
|----------|-------|------|------|--------|--------|
| AS04G | 1/4 | 17 | 13 | 41 | 30 |
| LS04G | 1/4 | 17 | 13 | 41 | 30 |
| AS06G | 3/8 | 19 | 15 | 46 | 50 |
| LS06G | 3/8 | 19 | 15 | 46 | 50 |
| AS08G | 1/2 | 22 | 18 | 70 | 110 |
| LS08G | 1/2 | 22 | 18 | 51 | 90 |
| UT12G | 3/4 | 30 | 20 | 73 | 215 |
| UT16G | 1 | 36 | 22 | 82 | 325 |
| UT20G | 1 1/4 | 46 | 25 | 113 | 635 |
| LC24G | 1 1/2 | 50 | 25 | 115 | 745 |
| LC32G | 2 | 65 | 29 | 142 | 1,275 |


F4



メートル雌ねじ(雌30°シート)

| 商品コードNo. | ねじメートルM | X mm | Y mm | (L) mm | 概略重量 g |
|---------------|---------|------|------|--------|--------|
| UT12F4 | M30×1.5 | 36 | 30 | 83 | 290 |
| UT16F4 | M33×1.5 | 41 | 36 | 96 | 440 |
| | | | | | |
| | | | | | |
| | | | | | |


F2



ユニファイ雌ねじ(雌37°シート)

| 商品コードNo. | ねじユニファイ UNF-2B | X mm | Y mm | (L) mm | 概略重量 g |
|------------------|----------------|------|------|--------|--------|
| SR04F2X17 | 7/16-20 | 17 | 14 | 44 | 35 |
| UT12F2 | 1 1/16-12 | 36 | 30 | 78 | 295 |
| UT16F2 | 1 5/16-12 | 41 | 36 | 87 | 405 |
| | | | | | |
| | | | | | |


F2R9



ユニファイ雌ねじ90°ベンド(雌37°シート)

| 商品コードNo. | ねじユニファイ UNF-2B | X mm | H mm | (L) mm | 概略重量 g |
|--------------------|----------------|------|------|--------|--------|
| SR04F2R957 | 7/16-20 | 17 | 25.1 | 54 | 40 |
| LS06F2X38 | 9/16-18 | 19 | 17 | 48 | 50 |
| UT12F2R9H53 | 1 1/16-12 | 31.8 | 53.1 | 96 | 310 |
| UT16F2R9 | 1 5/16-12 | 38.1 | 63.1 | 103 | 475 |
| | | | | | |
| | | | | | |


Q2



ロングタイプ(Q2)

| 商品コードNo. | ねじユニファイ UNF-2B | X mm | Y mm | (L) mm | 概略重量 g |
|-------------------|----------------|------|------|--------|--------|
| SR04Q2X801 | 9/16-18 | 19 | 17 | 43 | 45 |
| AS08Q2 | 13/16-16 | 27 | 22 | 73 | 155 |
| UT10Q2H27 | 1-14 | 32 | 27 | 75 | 230 |
| UT12Q2 | 1 3/16-12 | 36 | 30 | 78 | 310 |
| UN12Q2 | 1 3/16-12 | 36 | 30 | 90 | 347 |
| UT16Q2 | 1 7/16-12 | 41 | 36 | 90 | 455 |
| UN16Q2 | 1 7/16-12 | 41 | 36 | 97 | 531 |


Q2R4



ユニファイ雌ねじ45°ベンドフラットフェース

| 商品コードNo. | ねじユニファイ UNF-2B | X mm | H mm | (L) mm | 概略重量 g |
|--------------------|----------------|------|------|--------|--------|
| SR04Q2R4 | 9/16-18 | 19 | 11.4 | 60 | 55 |
| LS06Q2R4N21 | 11/16-16 | 22 | 21 | 71 | 95 |
| UT12Q2R4 | 1 3/16-12 | 36 | 26.5 | 96 | 325 |
| UN12Q2R4 | 1 3/16-12 | 36 | 26 | 106 | 362 |
| UT16Q2R4 | 1 7/16-12 | 41 | 30 | 116 | 505 |
| UN16Q2R4 | 1 7/16-12 | 41 | 30 | 124 | 576 |

Q2R9

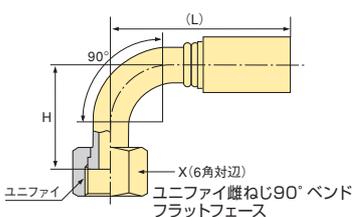


ユニファイ雌ねじ90°ベンドフラットフェース

| 商品コードNo. | ねじユニファイ UNF-2B | X mm | H mm | (L) mm | 概略重量 g |
|--------------------|----------------|------|------|--------|--------|
| SR04Q2R925 | 9/16-18 | 19 | 19.8 | 49 | 55 |
| SR04Q2R947 | 9/16-18 | 19 | 30.5 | 45 | 50 |
| LS06Q2R9N38 | 11/16-16 | 22 | 38 | 52 | 95 |
| UT12Q2R9 | 1 3/16-12 | 36 | 58.7 | 88 | 360 |
| UN12Q2R9 | 1 3/16-12 | 36 | 58 | 99 | 397 |
| UT16Q2R9 | 1 7/16-12 | 41 | 67 | 109 | 565 |
| UN16Q2R9 | 1 7/16-12 | 41 | 67 | 116 | 641 |


標準品:材質/SS・SC相当鋼 表面処理/亜鉛メッキ・クロメート処理

R




| 商品コードNo. | ねじR | Y mm | A mm | (L) mm | 概略重量 g |
|----------|-----|------|------|--------|--------|
| UL04R | 1/4 | 17 | 13 | 50 | 45 |
| UL06R | 3/8 | 19 | 15 | 58 | 85 |
| UL08R | 1/2 | 22 | 18 | 64 | 115 |
| UL1012R | 3/4 | 30 | 20 | 74 | 195 |
| UL12R | 3/4 | 30 | 20 | 77 | 240 |
| UX12R | 3/4 | 30 | 20 | 77 | 245 |
| UL16R | 1 | 36 | 22 | 87 | 360 |
| UX16R | 1 | 36 | 22 | 87 | 375 |

F




| 商品コードNo. | ねじG | X mm | Y mm | (L) mm | 概略重量 g |
|----------|-----|------|------|--------|--------|
| UL04F | 1/4 | 19 | 17 | 56 | 65 |
| UL06F | 3/8 | 22 | 19 | 62 | 100 |
| UL08F | 1/2 | 27 | 22 | 67 | 140 |
| UL1012F | 3/4 | 36 | 30 | 79 | 265 |
| UL12F | 3/4 | 36 | 30 | 83 | 315 |
| UX12F | 3/4 | 36 | 30 | 83 | 320 |
| UL16F | 1 | 41 | 36 | 93 | 445 |
| UX16F | 1 | 41 | 36 | 93 | 460 |

C




| 商品コードNo. | ねじG | X mm | Y mm | (L) mm | 概略重量 g |
|------------|-----|------|------|--------|--------|
| UL04C | 1/4 | 19 | 17 | 56 | 65 |
| UL06C | 3/8 | 22 | 19 | 62 | 100 |
| UL08C | 1/2 | 27 | 22 | 67 | 140 |
| UL1012C | 3/4 | 36 | 30 | 79 | 270 |
| UL1008CH27 | 1/2 | 27 | 27 | 73 | 190 |
| UL12C | 3/4 | 36 | 30 | 83 | 320 |
| UX12C | 3/4 | 36 | 30 | 83 | 325 |
| UL16C | 1 | 41 | 36 | 93 | 450 |
| UX16C | 1 | 41 | 36 | 93 | 470 |

CR4



| 商品コードNo. | ねじG | X mm | H mm | (L) mm | 概略重量 g |
|-----------|-----|------|------|--------|--------|
| UL04CR4 | 1/4 | 19 | 24 | 77 | 75 |
| UL06CR4 | 3/8 | 22 | 26 | 87 | 125 |
| UL08CR4 | 1/2 | 27 | 22 | 112 | 200 |
| UL1012CR4 | 3/4 | 36 | 29 | 101 | 320 |
| UL12CR4 | 3/4 | 36 | 29 | 104 | 370 |
| UX12CR4 | 3/4 | 36 | 29 | 104 | 375 |
| UL16CR4 | 1 | 41 | 33 | 125 | 570 |
| UX16CR4 | 1 | 41 | 33 | 125 | 590 |


CR9



| 商品コードNo. | ねじG | X mm | H mm | (L) mm | 概略重量 g |
|-----------|-----|------|------|--------|--------|
| UL04CR9 | 1/4 | 19 | 24 | 60 | 70 |
| UL06CR9 | 3/8 | 22 | 38 | 67 | 125 |
| UL08CR9 | 1/2 | 27 | 46 | 86 | 200 |
| UL1012CR9 | 3/4 | 36 | 60 | 91 | 355 |
| UL12CR9 | 3/4 | 36 | 60 | 94 | 400 |
| UX12CR9 | 3/4 | 36 | 60 | 94 | 405 |
| UL16CR9 | 1 | 41 | 70 | 114 | 640 |
| UX16CR9 | 1 | 41 | 70 | 114 | 655 |


標準品:材質/SS・SC相当鋼 表面処理/亜鉛メッキ・クロメート処理

S




| 商品コードNo. | A mm | B mm | φ mm | (L) mm | 概略重量 g |
|------------------|-------|-------------|------|--------|--------|
| UL08S | 30.20 | 25.53~25.40 | 35 | 72 | 130 |
| UL1012SCV | 38.10 | 31.88~31.75 | 37 | 84 | 230 |
| UX12S | 38.10 | 31.88~31.75 | 35 | 82 | 260 |
| UL16S | 44.45 | 39.75~39.62 | 35 | 87 | 370 |
| | | | | | |
| | | | | | |

SR4




| 商品コードNo. | A mm | B mm | H mm | (L) mm | 概略重量 g |
|----------------|-------|-------------|------|--------|--------|
| UL08SR4 | 30.20 | 25.53~25.40 | 20 | 77 | 140 |
| UL12SR4 | 38.10 | 31.88~31.75 | 25 | 100 | 310 |
| UL16SR4 | 44.45 | 39.75~39.62 | 28 | 112 | 455 |
| | | | | | |
| | | | | | |

SR9




| 商品コードNo. | A mm | B mm | H mm | (L) mm | 概略重量 g |
|------------------|-------|-------------|------|--------|--------|
| UL08SR9 | 30.20 | 25.53~25.40 | 41 | 72 | 155 |
| UL1012SR9 | 38.10 | 31.88~31.75 | 54 | 108 | 265 |
| UL12SR9 | 38.10 | 31.88~31.75 | 54 | 93 | 345 |
| UL16SR9 | 44.45 | 39.75~39.62 | 60 | 108 | 510 |
| UL1620SR9 | 50.80 | 44.58~44.45 | 67 | 108 | 555 |
| | | | | | |
| | | | | | |

G



| 商品コードNo. | ねじG | Y mm | A mm | (L) mm | 概略重量 g |
|----------------|-----|------|------|--------|--------|
| UL04G | 1/4 | 17 | 13 | 50 | 45 |
| UL06G | 3/8 | 19 | 15 | 58 | 85 |
| UL08G | 1/2 | 22 | 18 | 64 | 115 |
| UL1012G | 3/4 | 30 | 20 | 74 | 190 |
| UL12G | 3/4 | 30 | 20 | 77 | 235 |
| UX12G | 3/4 | 30 | 20 | 77 | 240 |
| UL16G | 1 | 36 | 22 | 87 | 360 |
| UX16G | 1 | 36 | 22 | 87 | 375 |


F4



| 商品コードNo. | ねじメートルM | X mm | Y mm | (L) mm | 概略重量 g |
|------------------|---------|------|------|--------|------------------|
| UL04F4 | M14×1.5 | 19 | 17 | 57 | 65 |
| UL06F4U24 | M18×1.5 | 24 | 19 | 64 | 110 |
| UL06F4 | M18×1.5 | 22 | 19 | 64 | 100 |
| UL08F4 | M22×1.5 | 27 | 22 | 70 | 145 |
| UL10F4 | M24×1.5 | 32 | 30 | 80 | 245 |
| UL12F4 | M30×1.5 | 36 | 30 | 87 | 310 |
| UX12F4 | M30×1.5 | 36 | 30 | 87 | 320 |
| UL16F4 | M33×1.5 | 41 | 36 | 100 | 475 ⁹ |

標準品:材質/SS・SC相当銅 表面処理/亜鉛メッキ・クロメート処理


F2



ユニファイ雌ねじ (雌37°シート)

| 商品コードNo. | ねじユニファイ UNF-2B | X mm | Y mm | (L) mm | 概略重量 g |
|----------|----------------|------|------|--------|--------|
| UL04F2 | 7/16-20 | 19 | 17 | 55 | 65 |
| UL06F2 | 9/16-18 | 22 | 19 | 61 | 100 |
| UL0608F2 | 3/4-16 | 27 | 22 | 65 | 135 |
| UL08F2 | 3/4-16 | 27 | 22 | 67 | 150 |
| UL0810F2 | 7/8-14 | 27 | 22 | 69 | 135 |
| UL10F2 | 7/8-14 | 32 | 30 | 78 | 245 |
| UL1012F2 | 1 1/16-12 | 36 | 30 | 79 | 275 |
| UL12F2 | 1 1/16-12 | 36 | 30 | 82 | 320 |
| UX12F2 | 1 1/16-12 | 36 | 30 | 83 | 325 |
| UL16F2 | 1 5/16-12 | 41 | 36 | 92 | 445 |
| UX16F2 | 1 5/16-12 | 41 | 36 | 92 | 460 |


F2R4



ユニファイ雌ねじ45° ベンド (雌37°シート)

| 商品コードNo. | ねじユニファイ UNF-2B | 形状 | X mm | H mm | (L) mm | 概略重量 g |
|---------------|----------------|----|------|------|--------|--------|
| UL04F2R422 | 7/16-20 | A | 19 | 13.7 | 77 | 70 |
| UL06F2R437 | 9/16-18 | A | 22 | 24.9 | 92 | 125 |
| UL0608F2R4N18 | 3/4-16 | B | 22 | 18 | 86 | 135 |
| UL08F2R4N31 | 3/4-16 | A | 22 | 23.9 | 114 | 200 |
| UL0810F2R405 | 7/8-14 | B | 32 | 35 | 118 | 200 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |


F2R9

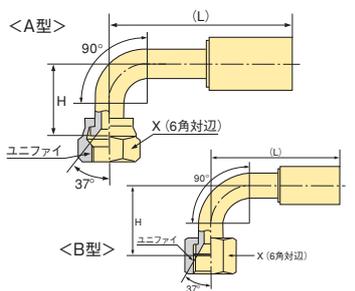

ユニファイ雌ねじ90° ベンド (雌37°シート)

| 商品コードNo. | ねじユニファイ UNF-2B | 形状 | X mm | H mm | (L) mm | 概略重量 g |
|--------------|----------------|----|------|------|--------|--------|
| UL04F2R9N25 | 7/16-20 | A | 19 | 25 | 66 | 75 |
| UL06F2R914 | 9/16-18 | A | 22 | 30 | 76 | 125 |
| UL0608F2R964 | 3/4-16 | B | 22 | 45 | 81 | 145 |
| UL08F2R9N50 | 3/4-16 | A | 27 | 39 | 88 | 200 |
| UL0810F2R911 | 7/8-14 | B | 25.4 | 65 | 78 | 200 |
| UL10F2R9 | 7/8-14 | B | 25.4 | 44 | 85 | 215 |
| UL12F2R9N78 | 1 1/16-12 | B | 36 | 78 | 105 | 500 |
| UX12F2R9 | 1 1/16-12 | B | 31.8 | 53 | 100 | 335 |
| UL16F2R9 | 1 5/16-12 | B | 38.1 | 63 | 108 | 510 |
| | | | | | | |
| | | | | | | |


Q2



フラットフェイス

| 商品コードNo. | ねじユニファイ UNF-2B | X mm | Y mm | (L) mm | 概略重量 g |
|-----------|----------------|------|------|--------|--------|
| UL04Q2 | 9/16-18 | 19 | 17 | 57 | 70 |
| UL06Q2 | 11/16-16 | 22 | 19 | 63 | 110 |
| UL08Q2 | 13/16-16 | 27 | 22 | 67 | 155 |
| UL10Q2 | 1-14 | 32 | 30 | 78 | 265 |
| UL10Q2H27 | 1-14 | 32 | 27 | 76 | 240 |
| UL1012Q2 | 1 3/16-12 | 36 | 30 | 79 | 280 |
| UL12Q2 | 1 3/16-12 | 36 | 30 | 82 | 330 |
| UX12Q2 | 1 3/16-12 | 36 | 30 | 82 | 335 |
| UL16Q2 | 1 7/16-12 | 41 | 36 | 95 | 490 |
| UX16Q2 | 1 7/16-12 | 41 | 36 | 95 | 510 |

Q2C7




ショートタイプ
フラットフェイス

| 商品コードNo. | ねじユニファイ UNF-2B | X mm | Y mm | (L) mm | 概略重量 g |
|-------------|----------------|------|------|--------|--------|
| UL04Q2C7 | 9/16-18 | 19 | 17 | 57 | 65 |
| UL06Q2C7 | 11/16-16 | 22 | 19 | 63 | 105 |
| UL08Q2C7 | 13/16-16 | 27 | 22 | 67 | 145 |
| UL10Q2H27C7 | 1-14 | 32 | 27 | 78 | 230 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

標準品: 材質/SS・SC相当鋼 表面処理/亜鉛メッキ・クロメート処理


R



管用テーパ雄ねじ

| 商品コードNo. | ねじR | Y mm | A mm | (L) mm | 概略重量 g |
|----------------|-------|------|------|--------|--------|
| UZ04R | 1/4 | 17 | 13 | 50 | 50 |
| UB06R | 3/8 | 19 | 15 | 58 | 85 |
| UB08R | 1/2 | 22 | 18 | 64 | 125 |
| UZ08R | 1/2 | 22 | 18 | 64 | 125 |
| UB1012R | 3/4 | 30 | 20 | 78 | 220 |
| UB12R | 3/4 | 30 | 20 | 85 | 285 |
| UB16R | 1 | 36 | 22 | 93 | 430 |
| UZ20R | 1 1/4 | 46 | 25.2 | 122 | 865 |


F



管用平行雌ねじ (雌30°シート)

| 商品コードNo. | ねじG | X mm | Y mm | (L) mm | 概略重量 g |
|----------------|-------|------|------|--------|--------|
| UZ04F | 1/4 | 19 | 17 | 56 | 70 |
| UB06F | 3/8 | 22 | 19 | 62 | 100 |
| UB08F | 1/2 | 27 | 22 | 67 | 145 |
| UZ08F | 1/2 | 27 | 22 | 67 | 145 |
| UB1012F | 3/4 | 36 | 30 | 83 | 290 |
| UB12F | 3/4 | 36 | 30 | 91 | 360 |
| UB16F | 1 | 41 | 36 | 99 | 515 |
| UZ20F | 1 1/4 | 50 | 46 | 128 | 965 |


C



管用平行雌ねじ (雄30°シート)

| 商品コードNo. | ねじG | X mm | Y mm | (L) mm | 概略重量 g |
|-------------------|-------|------|------|--------|--------|
| UZ04C | 1/4 | 19 | 17 | 56 | 70 |
| UB06C | 3/8 | 22 | 19 | 62 | 105 |
| UB08C | 1/2 | 27 | 22 | 67 | 150 |
| UZ08C | 1/2 | 27 | 22 | 67 | 150 |
| UB1012C | 3/4 | 36 | 30 | 83 | 295 |
| UB1008CH27 | 1/2 | 27 | 27 | 77 | 210 |
| UB12C | 3/4 | 36 | 30 | 91 | 365 |
| UB16C | 1 | 41 | 36 | 99 | 520 |
| UZ20C | 1 1/4 | 50 | 46 | 128 | 980 |


CR4



管用平行雌ねじ45°ベンド (雄30°シート)

| 商品コードNo. | ねじG | X mm | H mm | (L) mm | 概略重量 g |
|------------------|-------|------|------|--------|--------|
| UZ04CR4 | 1/4 | 19 | 24 | 77 | 75 |
| UB06CR4 | 3/8 | 22 | 26 | 87 | 125 |
| UB08CR4 | 1/2 | 27 | 22 | 120 | 210 |
| UZ08CR4 | 1/2 | 27 | 22 | 112 | 210 |
| UB1012CR4 | 3/4 | 36 | 29 | 101 | 345 |
| UB12CR4 | 3/4 | 36 | 29 | 112 | 415 |
| UB16CR4 | 1 | 41 | 33 | 131 | 640 |
| UZ20CR4 | 1 1/4 | 50 | 37.9 | 160 | 1,205 |


CR6



管用平行雌ねじ60°ベンド (雄30°シート)

| 商品コードNo. | ねじG | X mm | H mm | (L) mm | 概略重量 g |
|-------------------|-----|------|------|--------|--------|
| UZ04CR6N16 | 1/4 | 19 | 16 | 67 | 80 |
| UB06CR6N27 | 3/8 | 22 | 27 | 84 | 120 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

CR9




管用平行雌ねじ90°ベンド (雄30°シート)

| 商品コードNo. | ねじG | X mm | H mm | (L) mm | 概略重量 g |
|------------------|-------|------|------|--------|--------|
| UZ04CR9 | 1/4 | 19 | 24 | 60 | 75 |
| UB06CR9 | 3/8 | 22 | 38 | 67 | 125 |
| UB08CR9 | 1/2 | 27 | 46 | 94 | 210 |
| UZ08CR9 | 1/2 | 27 | 46 | 86 | 210 |
| UB1012CR9 | 3/4 | 36 | 60 | 95 | 380 |
| UB12CR9 | 3/4 | 36 | 60 | 102 | 445 |
| UB16CR9 | 1 | 41 | 70 | 120 | 705 |
| UZ20CR9 | 1 1/4 | 50 | 80 | 148 | 1,325 |


標準品：材質/SS・SC相当鋼 表面処理/亜鉛メッキ・クロメート処理

S




| 商品コードNo. | A mm | B mm | φ mm | (L) mm | 概略重量 g |
|----------------|-------|-------------|------|--------|--------|
| UB08S | 30.20 | 25.53~25.40 | 35 | 75 | 135 |
| UZ08S | 30.20 | 25.53~25.40 | 35 | 75 | 140 |
| UB1012S | 38.10 | 31.88~31.75 | 35 | 83 | 230 |
| UB12S | 38.10 | 31.88~31.75 | 35 | 90 | 305 |
| UB16S | 44.45 | 39.75~39.62 | 35 | 93 | 435 |
| UB20S | 50.80 | 44.58~44.45 | 44.1 | 123 | 950 |
| UZ20S | 50.80 | 44.58~44.45 | 41.1 | 123 | 905 |

SR4




| 商品コードNo. | A mm | B mm | H mm | (L) mm | 概略重量 g |
|------------------|-------|-------------|------|--------|--------|
| UB08SR4 | 30.20 | 25.53~25.40 | 20 | 77 | 145 |
| UZ08SR4 | 30.20 | 25.53~25.40 | 20 | 77 | 145 |
| UB1012SR4 | 38.10 | 31.88~31.75 | 25 | 116 | 305 |
| UB12SR4 | 38.10 | 31.88~31.75 | 25 | 108 | 350 |
| UB16SR4 | 44.45 | 39.75~39.62 | 28 | 117 | 525 |
| UB20SR4 | 50.80 | 44.58~44.45 | 30 | 143 | 930 |
| UZ20SR4 | 50.80 | 44.58~44.45 | 30 | 143 | 890 |

SR9




| 商品コードNo. | A mm | B mm | H mm | (L) mm | 概略重量 g |
|---------------------|-------|-------------|------|--------|--------|
| UB08SR9 | 30.20 | 25.53~25.40 | 41 | 72 | 160 |
| UB08SR970 | 30.20 | 25.53~25.40 | 90 | 87 | 310 |
| UB08SR9N60 | 30.20 | 25.53~25.40 | 60 | 86 | 195 |
| UZ08SR9 | 30.20 | 25.53~25.40 | 41 | 72 | 160 |
| UB1012SR9 | 38.10 | 31.88~31.75 | 54 | 93 | 290 |
| UB1008SR9N90 | 30.20 | 25.53~25.40 | 90 | 83 | 265 |
| UB12SR9 | 38.10 | 31.88~31.75 | 54 | 101 | 390 |
| UB1216SR9 | 44.45 | 39.75~39.62 | 60 | 101 | 425 |
| UB12SR9N150 | 38.10 | 31.88~31.75 | 150 | 141 | 615 |
| UB16SR9 | 44.45 | 39.75~39.62 | 60 | 113 | 575 |
| UB1620SR9 | 50.80 | 44.58~44.45 | 67 | 114 | 625 |
| UB16SR9N90 | 44.45 | 39.75~39.62 | 90 | 113 | 650 |
| UB20SR9 | 50.80 | 44.58~44.45 | 67 | 146 | 1,075 |
| UZ20SR9 | 50.80 | 44.58~44.45 | 67 | 146 | 1,035 |

H




| 商品コードNo. | A mm | B mm | φ mm | (L) mm | 概略重量 g |
|----------------|-------|-------------|------|--------|--------|
| UB08H | 31.75 | 25.53~25.40 | 40 | 76 | 170 |
| UB1012H | 41.28 | 31.88~31.75 | 35 | 73 | 240 |
| UB12H | 41.28 | 31.88~31.75 | 35 | 90 | 320 |
| UB16H | 47.63 | 39.75~39.62 | 38 | 97 | 480 |
| UB20H | 53.98 | 44.58~44.45 | 50.8 | 130 | 1,090 |
| UZ20H | 53.98 | 44.58~44.45 | 50.8 | 130 | 1,050 |

HR4



| 商品コードNo. | A mm | B mm | H mm | (L) mm | 概略重量 g |
|----------------|-------|-------------|------|--------|--------|
| UB08HR4 | 31.75 | 25.53~25.40 | 21 | 79 | 160 |
| UB12HR4 | 41.28 | 31.88~31.75 | 26 | 110 | 375 |
| UB16HR4 | 47.63 | 39.75~39.62 | 34 | 127 | 565 |
| UB20HR4 | 53.98 | 44.58~44.45 | 35 | 158 | 1,245 |
| UZ20HR4 | 53.98 | 44.58~44.45 | 35 | 158 | 1,205 |


HR9



| 商品コードNo. | A mm | B mm | H mm | (L) mm | 概略重量 g |
|---------------------|-------|-------------|------|--------|--------|
| UB08HR9 | 31.75 | 25.53~25.40 | 43 | 72 | 175 |
| UB1012HR9N55 | 41.28 | 31.88~31.75 | 55 | 101 | 330 |
| UB1012HR9 | 41.28 | 31.88~31.75 | 58 | 101 | 335 |
| UB12HR9 | 41.28 | 31.88~31.75 | 58 | 101 | 410 |
| UB16HR9 | 47.63 | 39.75~39.62 | 73 | 113 | 640 |
| UB16HR917 | 47.63 | 39.75~39.62 | 100 | 116 | 795 |
| UB20HR9 | 53.98 | 44.58~44.45 | 99 | 153 | 1,435 |
| UZ20HR9 | 53.98 | 44.58~44.45 | 99 | 153 | 1,390 |

標準品: 材質/SS・SC相当鋼 表面処理/亜鉛メッキ・クロメート処理


G



管平行雌ねじ

| 商品コードNo. | ねじR | Y mm | A mm | (L) mm | 概略重量 g |
|----------|-------|------|------|--------|--------|
| UZ04G | 1/4 | 17 | 13 | 50 | 50 |
| UB06G | 3/8 | 19 | 15 | 58 | 85 |
| UB08G | 1/2 | 22 | 18 | 64 | 120 |
| UZ08G | 1/2 | 22 | 18 | 64 | 120 |
| UB1012G | 3/4 | 30 | 20 | 78 | 215 |
| UB12G | 3/4 | 30 | 20 | 85 | 280 |
| UB16G | 1 | 36 | 22 | 93 | 425 |
| UZ20G | 1 1/4 | 46 | 25.2 | 122 | 860 |


F4



メートル雌ねじ (雌30°シート)

| 商品コードNo. | ねじメートルM | X mm | Y mm | (L) mm | 概略重量 g |
|-----------|---------|------|------|--------|--------|
| UZ04F4 | M14×1.5 | 19 | 17 | 57 | 70 |
| UB06F4U24 | M18×1.5 | 24 | 19 | 64 | 110 |
| UB06F4 | M18×1.5 | 22 | 19 | 64 | 100 |
| UB08F4 | M22×1.5 | 27 | 22 | 70 | 150 |
| UZ08F4 | M22×1.5 | 27 | 22 | 70 | 150 |
| UB10F4 | M24×1.5 | 32 | 30 | 84 | 270 |
| UB12F4 | M30×1.5 | 36 | 30 | 95 | 355 |
| UB16F4 | M33×1.5 | 41 | 41 | 106 | 545 |
| UZ20F4 | M36×1.5 | 50 | 46 | 130 | 800 |


F2



ユニファイ雌ねじ (雌37°シート)

| 商品コードNo. | ねじユニファイ UNF-2B | X mm | Y mm | (L) mm | 概略重量 g |
|----------|----------------|------|------|--------|--------|
| UZ04F2 | 7/16-20 | 19 | 17 | 55 | 65 |
| UB06F2 | 9/16-18 | 22 | 19 | 62 | 105 |
| UB0608F2 | 3/4-16 | 27 | 22 | 65 | 140 |
| UB08F2 | 3/4-16 | 27 | 22 | 67 | 160 |
| UB0810F2 | 7/8-14 | 27 | 22 | 69 | 145 |
| UZ08F2 | 3/4-16 | 27 | 22 | 67 | 160 |
| UZ0810F2 | 7/8-14 | 27 | 22 | 69 | 145 |
| UB10F2 | 7/8-14 | 32 | 30 | 81 | 270 |
| UB1012F2 | 1 1/16-12 | 36 | 30 | 83 | 300 |
| UB12F2 | 1 1/16-12 | 36 | 30 | 91 | 360 |
| UB16F2 | 1 5/16-12 | 41 | 36 | 98 | 510 |
| UZ20F2 | 1 5/8-12 | 50 | 46 | 128 | 965 |


F2R4



ユニファイ雌ねじ45°ベンド (雌37°シート)

| 商品コードNo. | ねじユニファイ UNF-2B | X mm | H mm | (L) mm | 概略重量 g |
|-------------|----------------|------|------|--------|--------|
| UZ04F2R422 | 7/16-20 | 19 | 13.7 | 77 | 70 |
| UB06F2R437 | 9/16-18 | 22 | 24.9 | 99 | 130 |
| UB08F2R4N18 | 3/4-16 | 27 | 18 | 116 | 200 |
| UB08F2R4N23 | 3/4-16 | 27 | 23.9 | 114 | 200 |
| UZ08F2R4N18 | 3/4-16 | 27 | 18 | 134 | 200 |
| UZ08F2R4 | 3/4-16 | 22 | 18 | 129 | 200 |
| UZ20F2R4N38 | 1 5/8-12 | 50.8 | 38.2 | 199 | 1,380 |

F2R9




ユニファイ雌ねじ90°ベンド (雌37°シート)

| 商品コードNo. | ねじユニファイ UNF-2B | X mm | H mm | (L) mm | 概略重量 g |
|-------------|----------------|------|------|--------|--------|
| UZ04F2R9N25 | 7/16-20 | 19 | 25 | 66 | 75 |
| UB06F2R914 | 9/16-18 | 22 | 30 | 88 | 125 |
| UB08F2R9N39 | 3/4-16 | 27 | 39.2 | 94 | 160 |
| UZ08F2R9N39 | 3/4-16 | 27 | 39.2 | 94 | 160 |
| UZ08F2R9N50 | 3/4-16 | 27 | 39 | 89 | 215 |
| UZ20F2R9N78 | 1 5/8-12 | 50.8 | 78 | 175 | 1,420 |

標準品：材質／SS・SC相当鋼 表面処理／亜鉛メッキ・クロメート処理


Q



セーフティホール付き

| 商品コードNo. | ねじG | Y mm | A mm | (L) mm | 概略重量 g |
|--------------|-----|------|------|--------|--------|
| UB08Q | 1/2 | 27 | 11 | 67 | 170 |
| | | | | | |
| | | | | | |
| | | | | | |


Q2



フラットフェイス


| 商品コードNo. | ねじユニファイ UNF-2B | X mm | Y mm | (L) mm | 概略重量 g |
|------------------|----------------|------|------|--------|--------|
| UZ04Q2 | 9/16-18 | 19 | 17 | 57 | 75 |
| UB06Q2 | 11/16-16 | 22 | 19 | 63 | 115 |
| UB08Q2 | 13/16-16 | 27 | 22 | 67 | 165 |
| UZ08Q2 | 13/16-16 | 27 | 22 | 67 | 165 |
| UB10Q2 | 1-14 | 32 | 30 | 82 | 285 |
| UB10Q2H27 | 1-14 | 32 | 27 | 80 | 265 |
| UB1012Q2 | 1 3/16-12 | 36 | 30 | 82 | 305 |
| UB12Q2 | 1 3/16-12 | 36 | 30 | 90 | 375 |
| UB16Q2 | 1 7/16-12 | 41 | 36 | 101 | 560 |
| UZ20Q2 | 1 11/16-12 | 50 | 46 | 125 | 1,060 |
| UB20Q2 | 1 11/16-12 | 50 | 50 | 131 | 1,360 |

Q2C7

ショートタイプ
フラットフェイス


| 商品コードNo. | ねじユニファイ UNF-2B | X mm | Y mm | (L) mm | 概略重量 g |
|--------------------|----------------|------|------|--------|--------|
| UZ04Q2C7 | 9/16-18 | 19 | 17 | 57 | 70 |
| UB06Q2C7 | 11/16-16 | 22 | 19 | 63 | 105 |
| UB08Q2C7 | 13/16-16 | 27 | 22 | 67 | 155 |
| UZ08Q2C7 | 13/16-16 | 27 | 22 | 67 | 155 |
| UB10Q2H27C7 | 1-14 | 32 | 27 | 82 | 255 |
| | | | | | |
| | | | | | |
| | | | | | |

Q2R4

ユニファイ雌ねじ45° ベンド
フラットフェイス

| 商品コードNo. | ねじユニファイ UNF-2B | X mm | H mm | (L) mm | 概略重量 g |
|---------------------|----------------|------|------|--------|--------|
| UZ04Q2R4 | 9/16-18 | 19 | 11 | 73 | 75 |
| UB06Q2R4 | 11/16-16 | 22 | 21 | 89 | 140 |
| UB08Q2R4 | 13/16-16 | 27 | 22 | 82 | 175 |
| UZ08Q2R4N22 | 13/16-16 | 27 | 22 | 82 | 175 |
| UB10Q2R4N26 | 1-14 | 32 | 26 | 101 | 300 |
| UB1012Q2R408 | 1 3/16-12 | 36 | 26 | 106 | 325 |
| UB12Q2R4 | 1 3/16-12 | 36 | 26 | 108 | 390 |
| UB16Q2R4 | 1 7/16-12 | 41 | 30 | 127 | 605 |
| UB20Q2R4N40 | 1 11/16-12 | 50 | 40 | 158 | 1,040 |
| UZ20Q2R4 | 1 11/16-12 | 50 | 40 | 158 | 1,210 |

Q2R9

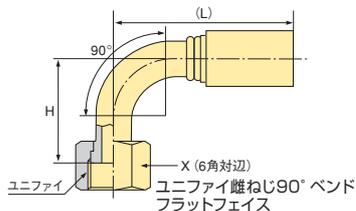ユニファイ雌ねじ90° ベンド
フラットフェイス


| 商品コードNo. | ねじユニファイ UNF-2B | X mm | H mm | (L) mm | 概略重量 g |
|----------------------|----------------|------|------|--------|--------|
| UZ04Q2R9 | 9/16-18 | 19 | 23 | 60 | 80 |
| UB06Q2R9 | 11/16-16 | 22 | 38 | 67 | 140 |
| UB08Q2R9 | 13/16-16 | 27 | 43 | 75 | 195 |
| UZ08Q2R9 | 13/16-16 | 27 | 43 | 75 | 195 |
| UB10Q2R9 | 1-14 | 32 | 55 | 96 | 330 |
| UB1012Q2R9N58 | 1 3/16-12 | 36 | 58 | 92 | 365 |
| UB12Q2R9 | 1 3/16-12 | 36 | 58 | 100 | 425 |
| UB16Q2R9 | 1 7/16-12 | 41 | 67 | 120 | 670 |
| UB20Q2R9N100 | 1 11/16-12 | 50 | 100 | 153 | 1,100 |
| UZ20Q2R9 | 1 11/16-12 | 50 | 74 | 153 | 1,330 |

標準品: 材質/SS・SC相当鋼 表面処理/亜鉛メッキ・クロメート処理

K

JIS SHA

適用ボルト穴径

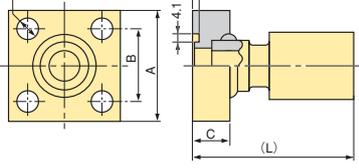


JIS B 2291 21.0MPa管フランジ

| 商品コードNo. | A mm | B mm | C mm | (L) mm | 適用ボルト | 適用ボルト穴径mm | 概略重量g |
|----------------|------|------|------|--------|--------|-----------|-------|
| UB08K15 | 63 | 40 | 22 | 79 | 8YAK15 | 11 | 690 |
| UZ08K15 | 63 | 40 | 22 | 79 | 8YAK15 | 11 | 690 |
| UB12K20 | 68 | 45 | 22 | 100 | 8YAK15 | 11 | 920 |
| UB16K25 | 80 | 53 | 28 | 105 | 8YAK25 | 13 | 1,625 |
| UB20K32 | 90 | 63 | 28 | 138 | 8YAK25 | 13 | 2,430 |
| UZ20K32 | 90 | 63 | 28 | 138 | 8YAK25 | 13 | 2,390 |
| UB24K40 | 100 | 70 | 36 | 162 | 8YAK40 | 18 | 3,660 |

K1

JIS SHB

適用ボルト穴径

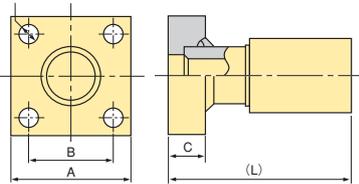


JIS B 2291 21.0MPa管フランジ

| 商品コードNo. | A mm | B mm | C mm | (L) mm | 適用ボルト | 適用ボルト穴径mm | 概略重量g |
|-----------------|------|------|------|--------|--------|-----------|-------|
| UB08K115 | 63 | 40 | 22 | 79 | 8YAK15 | 11 | 690 |
| UZ08K115 | 63 | 40 | 22 | 79 | 8YAK15 | 11 | 690 |
| UB12K120 | 68 | 45 | 22 | 100 | 8YAK15 | 11 | 950 |
| UB16K125 | 80 | 53 | 28 | 105 | 8YAK25 | 13 | 1,540 |
| UB20K132 | 90 | 63 | 28 | 138 | 8YAK25 | 13 | 2,450 |
| UZ20K132 | 90 | 63 | 28 | 138 | 8YAK25 | 13 | 2,400 |
| UB24K140 | 100 | 70 | 36 | 162 | 8YAK40 | 18 | 3,670 |

K2

JIS SSA

適用ボルト穴径

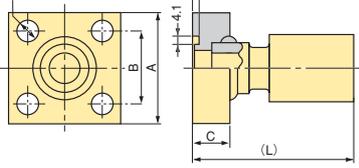


JIS B 2291 21.0MPa管フランジ

| 商品コードNo. | A mm | B mm | C mm | (L) mm | 適用ボルト | 適用ボルト穴径mm | 概略重量g |
|-----------------|------|------|------|--------|---------|-----------|-------|
| UB08K215 | 54 | 36 | 22 | 79 | 8YBK215 | 11 | 620 |
| UZ08K215 | 54 | 36 | 22 | 79 | 8YBK215 | 11 | 620 |
| UB12K220 | 58 | 40 | 22 | 100 | 8YBK215 | 11 | 700 |
| UB16K225 | 68 | 48 | 28 | 105 | 8YBK225 | 13 | 1,140 |
| UB20K232 | 76 | 56 | 28 | 138 | 8YBK225 | 13 | 1,940 |
| UZ20K232 | 76 | 56 | 28 | 138 | 8YBK225 | 13 | 1,900 |
| UB24K240 | 92 | 65 | 36 | 162 | 8YBK240 | 18 | 3,380 |

K3

JIS SSB

ボルトねじ通し

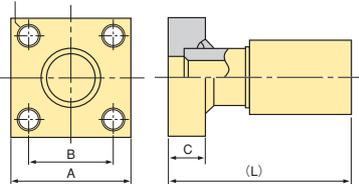


JIS B 2291 21.0MPa管フランジ

| 商品コードNo. | A mm | B mm | C mm | (L) mm | 適用ボルト | 概略重量g |
|-----------------|------|------|------|--------|---------|-------|
| UB08K315 | 54 | 36 | 22 | 79 | 8YBK215 | 550 |
| UZ08K315 | 54 | 36 | 22 | 79 | 8YBK215 | 550 |
| UB12K320 | 58 | 40 | 22 | 100 | 8YBK215 | 760 |
| UB16K325 | 68 | 48 | 28 | 105 | 8YBK225 | 1,190 |
| UB20K332 | 76 | 56 | 28 | 138 | 8YBK225 | 1,980 |
| UZ20K332 | 76 | 56 | 28 | 138 | 8YBK225 | 1,930 |
| UB24K340 | 92 | 65 | 36 | 162 | 8YBK240 | 3,390 |

K4

JIS LSA

適用ボルト穴径

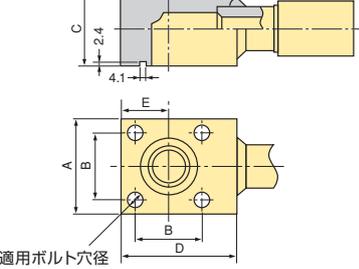


JIS B 2291 21.0MPa管フランジ

| 商品コードNo. | A mm | B mm | C mm | D mm | E mm | (L) mm | 適用ボルト | 適用ボルト穴径mm | 概略重量g |
|-----------------|------|------|------|------|------|--------|-------------|-----------|-------|
| UB08K415 | 54 | 36 | 40 | 63 | 27 | 93 | 8YBM10L65S6 | 11 | 950 |
| UZ08K415 | 54 | 36 | 40 | 63 | 27 | 93 | 8YBM10L65S6 | 11 | 950 |
| UB12K420 | 58 | 40 | 45 | 70 | 29 | 119 | 8YBM10L70S6 | 11 | 1,420 |
| UB16K425 | 68 | 48 | 50 | 82 | 34 | 125 | 8YBM12L80S6 | 13 | 2,040 |
| UB20K432 | 76 | 56 | 63 | 92 | 38 | 164 | 8YBM12L90S6 | 13 | 3,540 |
| UZ20K432 | 76 | 56 | 63 | 92 | 38 | 164 | 8YBM12L90S6 | 13 | 3,490 |


標準品:材質/SS・SC相当鋼 表面処理/亜鉛メッキ・クロメート処理

KR9

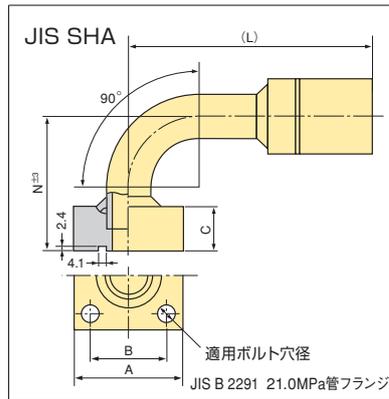


| 商品コードNo. | A mm | B mm | C mm | N mm | (L) mm | 適用ボルト | 適用ボルト 穴径mm | 概略重量 g |
|----------------------|------|------|------|------|--------|--------|---------------|-----------|
| UB08K15R9N67 | 63 | 40 | 22 | 67 | 121 | 8YAK15 | 11 | 900 |
| UZ08K15R9N67 | 63 | 40 | 22 | 67 | 121 | 8YAK15 | 11 | 900 |
| UB12K20R9N75 | 68 | 45 | 22 | 75 | 154 | 8YAK15 | 11 | 1,350 |
| UB16K25R9N93 | 80 | 53 | 28 | 93 | 176 | 8YAK25 | 13 | 2,180 |
| UB20K32R9N108 | 90 | 63 | 28 | 108 | 218 | 8YAK25 | 13 | 3,360 |
| UZ20K32R9N108 | 90 | 63 | 28 | 108 | 218 | 8YAK25 | 13 | 3,310 |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

K1R9

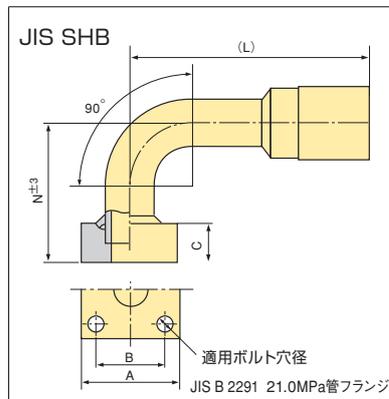


| 商品コードNo. | A mm | B mm | C mm | N mm | (L) mm | 適用ボルト | 適用ボルト 穴径mm | 概略重量 g |
|-----------------------|------|------|------|------|--------|--------|---------------|-----------|
| UB08K115R928 | 63 | 40 | 22 | 67 | 121 | 8YAK15 | 11 | 890 |
| UZ08K115R928 | 63 | 40 | 22 | 67 | 121 | 8YAK15 | 11 | 890 |
| UB12K120R9N75 | 68 | 45 | 22 | 75 | 154 | 8YAK15 | 11 | 1,420 |
| UB16K125R9N100 | 80 | 53 | 28 | 100 | 176 | 8YAK25 | 13 | 2,160 |
| UB20K132R9N108 | 90 | 63 | 28 | 108 | 218 | 8YAK25 | 13 | 3,370 |
| UZ20K132R9N108 | 90 | 63 | 28 | 108 | 218 | 8YAK25 | 13 | 3,320 |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

K2R9

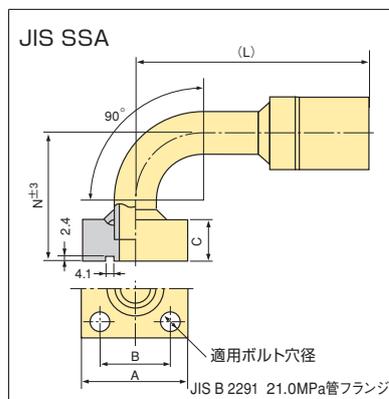

| 商品コードNo. | A mm | B mm | C mm | N mm | (L) mm | 適用ボルト | 適用ボルト 穴径mm | 概略重量 g |
|-----------------------|------|------|------|------|--------|---------|---------------|-----------|
| UB08K215R915 | 54 | 36 | 22 | 67 | 121 | 8YBK215 | 11 | 760 |
| UZ08K215R915 | 54 | 36 | 22 | 67 | 121 | 8YBK215 | 11 | 760 |
| UB12K220R969 | 58 | 40 | 22 | 75 | 154 | 8YBK215 | 11 | 1,170 |
| UB16K225R926 | 68 | 48 | 28 | 93 | 176 | 8YBK225 | 13 | 1,800 |
| UB20K232R9N108 | 76 | 56 | 28 | 108 | 218 | 8YBK225 | 13 | 2,850 |
| UZ20K232R9N108 | 76 | 56 | 28 | 108 | 218 | 8YBK225 | 13 | 2,800 |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |


K3R9

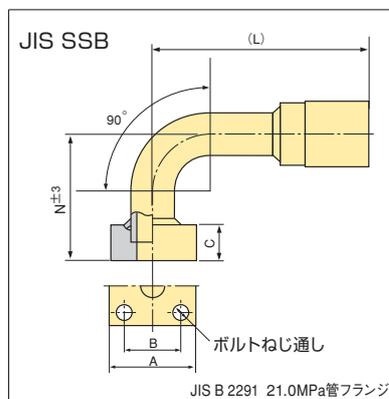

| 商品コードNo. | A mm | B mm | C mm | N mm | (L) mm | 適用ボルト | 概略重量 g |
|-----------------------|------|------|------|------|--------|---------|-----------|
| UZ08K315R9N67 | 54 | 36 | 22 | 67 | 121 | 8YBK215 | 760 |
| UB12K320R9N75 | 58 | 40 | 22 | 75 | 154 | 8YBK215 | 1,130 |
| UB16K325R9N90 | 68 | 48 | 28 | 90 | 176 | 8YBK225 | 1,840 |
| UZ20K332R9N108 | 76 | 56 | 28 | 108 | 218 | 8YBK225 | 2,850 |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

標準品:材質/SS・SC相当鋼 表面処理/亜鉛メッキ・クロメート処理


R



管用テーパ雄ねじ

| 商品コードNo. | ねじR | Y mm | A mm | (L) mm | 概略重量 g |
|--------------|-------|------|------|--------|--------|
| KH06R | 3/8 | 19 | 15 | 68 | 110 |
| HW24R | 1 1/2 | 50 | 25 | 119 | 970 |
| UZ24R | 1.1/2 | 50 | 25.2 | 126 | 1,175 |
| HW32R | 2 | 65 | 29 | 151 | 1,770 |
| | | | | | |
| | | | | | |


F



管用平行雌ねじ(雌30°シート)

| 商品コードNo. | ねじG | X mm | Y mm | (L) mm | 概略重量 g |
|--------------|-------|------|------|--------|--------|
| HW24F | 1 1/2 | 55 | 50 | 128 | 1,095 |
| UZ24F | 1.1/2 | 55 | 50 | 135 | 1,300 |
| HW32F | 2 | 70 | 65 | 159 | 1,955 |
| | | | | | |
| | | | | | |


C



管用平行雌ねじ(雌30°シート)

| 商品コードNo. | ねじG | X mm | Y mm | (L) mm | 概略重量 g |
|----------------|-------|------|------|--------|--------|
| KH1416C | 1 | 41 | 36 | 102 | 495 |
| HW24C | 1 1/2 | 55 | 50 | 128 | 1,130 |
| UZ24C | 1.1/2 | 55 | 50 | 135 | 1,335 |
| HW32C | 2 | 70 | 65 | 159 | 2,015 |
| | | | | | |
| | | | | | |


CR4



管用平行雌ねじ45°バンド(雌30°シート)

| 商品コードNo. | ねじG | X/Y mm | H mm | (L) mm | 概略重量 g |
|-------------------|-------|--------|------|--------|--------|
| HW24CR4N52 | 1 1/2 | 55 | 52 | 220 | 1,630 |
| UZ24CR4T52 | 1.1/2 | 55/55 | 52 | 228 | 1,870 |
| HW32CR4N69 | 2 | Xなし/70 | 69.1 | 263 | 2,905 |
| | | | | | |
| | | | | | |


CR9



管用平行雌ねじ90°バンド(雌30°シート)

| 商品コードNo. | ねじG | X/Y mm | H mm | (L) mm | 概略重量 g |
|--------------------|-------|--------|------|--------|--------|
| HW24CR9N103 | 1 1/2 | 55 | 103 | 178 | 1,900 |
| UZ24CR9T105 | 1.1/2 | 55/55 | 105 | 156 | 1,830 |
| HW32CR920 | 2 | Xなし/70 | 150 | 215 | 3,240 |
| | | | | | |
| | | | | | |

Q




セーフティーホール付き

| 商品コードNo. | ねじG | Y mm | A mm | (L) mm | 概略重量 g |
|-----------------|-----|------|------|--------|--------|
| KH06QH22 | 3/8 | 22 | 10 | 72 | 130 |
| | | | | | |
| | | | | | |

標準品:材質/SS・SC相当鋼 表面処理/亜鉛メッキ・クロメート処理


S



フランジタイプ (SAEスタンダード用)


| 商品コードNo. | A mm | B mm | φ mm | (L) mm | 概略重量 g |
|--------------|-------|-------------|------|--------|--------|
| HW24S | 60.32 | 53.98~53.72 | 44 | 118 | 925 |
| UZ24S | 60.32 | 53.98~53.72 | 43.2 | 125 | 1,175 |
| UB24S | 60.32 | 53.98~53.72 | 43.2 | 135 | 1,520 |
| HW32S | 71.42 | 63.50~63.25 | 51 | 150 | 1,620 |
| KN32S | 71.42 | 63.50~63.25 | 51 | 169 | 2,360 |
| | | | | | |
| | | | | | |
| | | | | | |

SR4

フランジタイプ45°ベンド
(SAEスタンダード用)


| 商品コードNo. | A mm | B mm | H mm | (L) mm | 概略重量 g |
|-------------------|-------|-------------|------|--------|--------|
| HW24SR4 | 60.32 | 53.98~53.72 | 37 | 157 | 1,115 |
| UZ24SR4 | 60.32 | 53.98~53.72 | 37 | 165 | 1,375 |
| UB24SR4 | 60.32 | 53.98~53.72 | 37 | 175 | 1,720 |
| HW32SR4N56 | 71.42 | 63.50~63.25 | 56 | 238 | 2,315 |
| KN32SR4N56 | 71.42 | 63.50~63.25 | 56 | 258 | 3,040 |
| | | | | | |
| | | | | | |
| | | | | | |

SR9

フランジタイプ90°ベンド
(SAEスタンダード用)

| 商品コードNo. | A mm | B mm | H mm | (L) mm | 概略重量 g |
|----------------|-------|-------------|------|--------|--------|
| HW24SR9 | 60.32 | 53.98~53.72 | 80 | 148 | 1,265 |
| UZ24SR9 | 60.32 | 53.98~53.72 | 80 | 156 | 1,550 |
| UB24SR9 | 60.32 | 53.98~53.72 | 80 | 166 | 1,890 |
| HW32SR9 | 71.42 | 63.50~63.25 | 115 | 215 | 2,525 |
| KN32SR9 | 71.42 | 63.50~63.25 | 115 | 234 | 3,285 |
| | | | | | |
| | | | | | |
| | | | | | |


H



フランジタイプ (SAEハイプレッシャー用)

| 商品コードNo. | A mm | B mm | φ mm | (L) mm | 概略重量 g |
|--------------|-------|-------------|------|--------|--------|
| HW24H | 63.50 | 53.98~53.72 | 54 | 129 | 1,070 |
| UZ24H | 63.50 | 53.98~53.72 | 82 | 164 | 1,440 |
| UB24H | 63.50 | 53.98~53.72 | 82 | 174 | 1,785 |
| EX32H | 79.38 | 63.50~63.25 | 100 | 204 | 3,580 |
| HW32H | 79.38 | 63.50~63.25 | 69 | 169 | 1,950 |
| KD32H | 79.38 | 63.50~63.25 | 69 | 187 | 2,770 |
| KN32H | 79.38 | 63.50~63.25 | 69 | 187 | 2,700 |
| | | | | | |
| | | | | | |
| | | | | | |


HR4

フランジタイプ45°ベンド
(SAEハイプレッシャー用)

| 商品コードNo. | A mm | B mm | H mm | (L) mm | 概略重量 g |
|--------------------|-------|-------------|------|--------|--------|
| HW24HR4 | 63.50 | 53.98~53.72 | 46 | 158 | 1,250 |
| UZ24HR4N46 | 63.50 | 53.98~53.72 | 46 | 179 | 1,655 |
| UB24HR4N46 | 63.50 | 53.98~53.72 | 46 | 189 | 2,000 |
| EX32HR4N106 | 79.38 | 63.50~63.25 | 107 | 349 | 5,135 |
| HW32HR4N67 | 79.38 | 63.50~63.25 | 67 | 249 | 2,615 |
| KD32HR4N69 | 79.38 | 63.50~63.25 | 70 | 271 | 3,475 |
| | | | | | |
| | | | | | |
| | | | | | |


標準品:材質/SS・SC相当鋼 表面処理/亜鉛メッキ・クロメート処理

HR9



| 商品コードNo. | A mm | B mm | H mm | (L) mm | 概略重量 g |
|-------------|-------|-------------|------|--------|--------|
| HW24HR9N91 | 63.50 | 53.98~53.72 | 91 | 148 | 1,410 |
| UZ24HR9N91 | 63.50 | 53.98~53.72 | 91 | 165 | 1,845 |
| UB24HR9N120 | 63.50 | 53.98~53.72 | 120 | 175 | 2,340 |
| EX32HR9N155 | 79.38 | 63.50~63.25 | 155 | 289 | 5,275 |
| HW32HR9 | 79.38 | 63.50~63.25 | 136 | 223 | 2,925 |
| KD32HR903 | 79.38 | 63.50~63.25 | 136 | 234 | 3,700 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |


G



| 商品コードNo. | ねじG | Y mm | A mm | (L) mm | 概略重量 g |
|----------|-------|------|------|--------|--------|
| KH1416G | 1 | 36 | 22 | 96 | 400 |
| KZ1416G | 1 | 36 | 22 | 93 | 425 |
| HW24G | 1 1/2 | 50 | 25 | 119 | 955 |
| UZ24G | 1 1/2 | 50 | 25.2 | 126 | 1,200 |
| HW32G | 2 | 65 | 29 | 151 | 1,690 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

K


JIS SHA

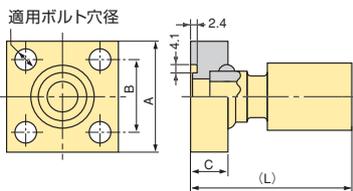

| 商品コードNo. | A mm | B mm | C mm | (L) mm | 適用ボルト | 適用ボルト穴径mm | 概略重量 g |
|----------|------|------|------|--------|--------|-----------|--------|
| HW24K40 | 100 | 70 | 36 | 139 | 8YAK40 | 18 | 3,660 |
| UZ24K40 | 100 | 70 | 36 | 152 | 8YAK40 | 18 | 3,310 |
| HW32K50 | 112 | 80 | 36 | 193 | 8YAK40 | 18 | 4,570 |
| KN32K50 | 112 | 80 | 36 | 210 | 8YAK40 | 18 | 5,270 |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

K1


JIS SHB

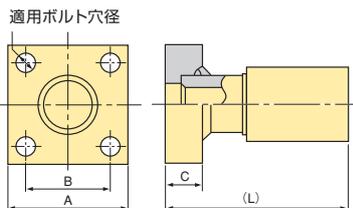

| 商品コードNo. | A mm | B mm | C mm | (L) mm | 適用ボルト | 適用ボルト穴径mm | 概略重量 g |
|----------|------|------|------|--------|--------|-----------|--------|
| HW24K140 | 100 | 70 | 36 | 139 | 8YAK40 | 18 | 3,090 |
| UZ24K140 | 100 | 70 | 36 | 152 | 8YAK40 | 18 | 3,310 |
| HW32K150 | 112 | 80 | 36 | 193 | 8YAK40 | 18 | 4,570 |
| KN32K150 | 112 | 80 | 36 | 210 | 8YAK40 | 18 | 5,230 |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

標準品:材質/SS・SC相当鋼 表面処理/亜鉛メッキ・クロメート処理


C



管用平行雌ねじ (雄30°シート)

| 商品コードNo. | ねじG | X mm | Y mm | (L) mm | 概略重量 g |
|----------|-------|------|------|--------|--------|
| EA0304C | 1/4 | 19 | 19 | 54 | 60 |
| EC0304C | 1/4 | 19 | 19 | 55 | 70 |
| GA04C | 1/4 | 19 | 17 | 56 | 65 |
| GB04C | 1/4 | 19 | 17 | 56 | 65 |
| GA06C | 3/8 | 22 | 19 | 62 | 90 |
| UF06C | 3/8 | 22 | 19 | 61 | 105 |
| UG06C | 3/8 | 22 | 19 | 64 | 110 |
| UF08C | 1/2 | 27 | 22 | 67 | 155 |
| UG08C | 1/2 | 27 | 22 | 70 | 150 |
| GB12C | 3/4 | 36 | 30 | 90 | 360 |
| UG12C | 3/4 | 36 | 30 | 82 | 335 |
| GB16C | 1 | 41 | 36 | 99 | 520 |
| UG16C | 1 | 41 | 36 | 92 | 485 |
| EC24C | 1 1/2 | 55 | 50 | 128 | 1,035 |
| EC32C | 2 | 70 | 65 | 159 | 1,850 |
| | | | | | |
| | | | | | |
| | | | | | |


CR4



管用平行雌ねじ45° ベンド (雄30°シート)

| 商品コードNo. | ねじG | X mm | H mm | (L) mm | 概略重量 g |
|----------|-----|------|------|--------|--------|
| GA04CR4 | 1/4 | 19 | 24 | 77 | 75 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

CR9




管用平行雌ねじ90° ベンド (雄30°シート)

| 商品コードNo. | ねじG | X mm | H mm | (L) mm | 概略重量 g |
|----------|-------|------|------|--------|--------|
| GA04CR9 | 1/4 | 19 | 24 | 60 | 70 |
| GB04CR9 | 1/4 | 19 | 24 | 60 | 70 |
| GA06CR9 | 3/8 | 22 | 38 | 67 | 115 |
| UF06CR9 | 3/8 | 22 | 38 | 66 | 130 |
| UG06CR9 | 3/8 | 22 | 38 | 69 | 135 |
| UF08CR9 | 1/2 | 27 | 46 | 86 | 210 |
| UG08CR9 | 1/2 | 27 | 46 | 89 | 205 |
| GB12CR9 | 3/4 | 36 | 60 | 102 | 440 |
| UG12CR9 | 3/4 | 36 | 60 | 93 | 415 |
| EC24CR9 | 1 1/2 | 55 | 105 | 184 | 1,420 |
| EC32CR9 | 2 | 70 | 150 | 215 | 3,220 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

標準品: 材質/SS・SC相当鋼 表面処理/亜鉛メッキ・クロメート処理


S



フランジタイプ(SAEスタンダード用)


| 商品コードNo. | A mm | B mm | ℓ mm | (L) mm | 概略重量 g |
|--------------|-------|-------------|------|--------|--------|
| GB12S | 38.10 | 31.88~31.75 | 35 | 90 | 300 |
| GB16S | 44.45 | 39.75~39.62 | 35 | 93 | 435 |
| EC24S | 60.32 | 53.98~53.72 | 44 | 119 | 790 |
| EC32S | 71.42 | 63.50~63.25 | 50 | 150 | 1,630 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

SR9

フランジタイプ90° ベンド
(SAEスタンダード用)

| 商品コードNo. | A mm | B mm | H mm | (L) mm | 概略重量 g |
|----------------|-------|-------------|------|--------|--------|
| GB16SR9 | 44.45 | 39.75~39.62 | 60 | 113 | 575 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |


H



フランジタイプ (SAEハイプレッシャー用)


| 商品コードNo. | A mm | B mm | ℓ mm | (L) mm | 概略重量 g |
|--------------|-------|-------------|------|--------|--------|
| GB12H | 41.28 | 31.88~31.75 | 35 | 90 | 315 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

HR9

フランジタイプ90° ベンド
(SAEハイプレッシャー用)

| 商品コードNo. | A mm | B mm | H mm | (L) mm | 概略重量 g |
|----------------|-------|-------------|------|--------|--------|
| GB12HR9 | 41.28 | 31.88~31.75 | 58 | 101 | 410 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

G



管用平行雄ねじ

| 商品コードNo. | ねじG | Y mm | A mm | (L) mm | 概略重量 g |
|--------------|-----|------|------|--------|--------|
| GA04G | 1/4 | 17 | 13 | 50 | 45 |
| GB04G | 1/4 | 17 | 13 | 50 | 50 |
| GA06G | 3/8 | 19 | 15 | 58 | 70 |
| UF06G | 3/8 | 19 | 15 | 57 | 90 |
| UF08G | 1/2 | 22 | 18 | 64 | 125 |
| GB12G | 3/4 | 30 | 20 | 76 | 275 |
| UG12G | 3/4 | 30 | 20 | 76 | 250 |
| GB16G | 1 | 36 | 22 | 93 | 430 |
| | | | | | |
| | | | | | |

標準品: 材質/SS・SC相当鋼 表面処理/亜鉛メッキ・クロメート処理